


WIDEX ENJOY™ XP WITH DUAL CORE PROCESSOR



The WIDEX ITE is based on the WIDEX ENJOY-platform, with a Widex dual core chip that handles automatic processing more accurately and faster than before.

- Multiple wireless connectivity via WidexLink technology and TONELINK App
- Compatible with the DEX assistive listening devices
- Uses a size 312 battery
- Protection class IP68
- Minimal to severe hearing losses

SUGGESTED FITTING RANGE

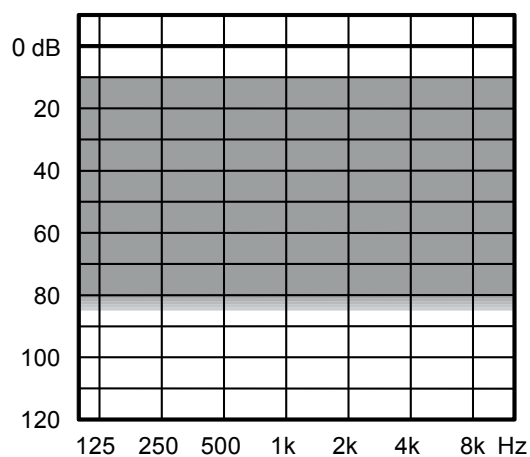

STANDARD TECHNOLOGY

- Improved Widex open-fit rationales
- Acclimatisation rationales
- Power Saver IV technology for low current consumption

KEY FEATURES	100	50	30
Performance	xxx	xx	x
Processing and fine-tuning channels	6	4	4

CONNECTIVITY

WidexLink to DEX assistive listening devices*	•	•	
Telecoil	•	•	•

APPS FOR iOS AND ANDROID

TONELINK App	•	•	
COM-DEX App	•	•	


FEATURES

Adaptation manager	Auto	Auto	Manuel
Programs	3	3	3
Locator	•	•	•
Preference Control**	•	•	•
Soft-level noise reduction	•	•	•
Noise Reduction	NR	Minimal	Minimal
Locator	Broad-band	Broad-band	Omni/ Front
ZEN IE/ZEN+	•	•	
CROS Support	•	•	•
Audibility Extender	•		


*Also includes DEX assistive listening devices: CALL-DEX, TV-DEX, COM-DEX, UNI-DEX, RC-DEX, FM+ DEX, PHONE-DEX 2

** Preference Control via TONELINK App or DEX


MAXIMUM OUTPUT - EAR SIMULATOR

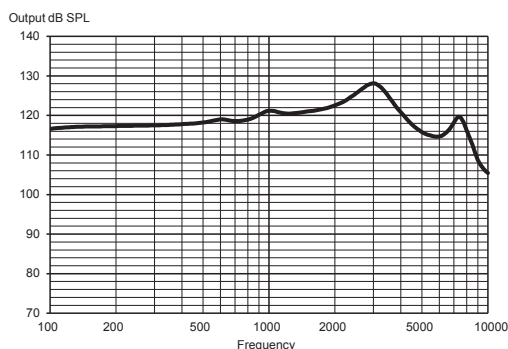


MAXIMUM OUTPUT - 2CC COUPLER

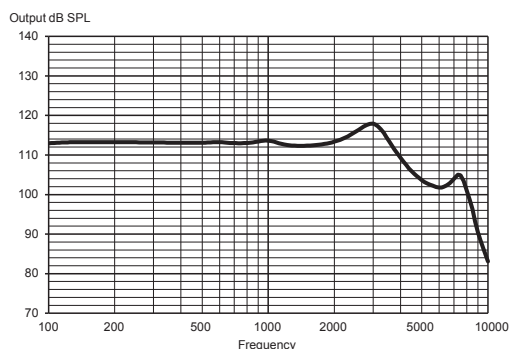

OUTPUT - EAR SIMULATOR

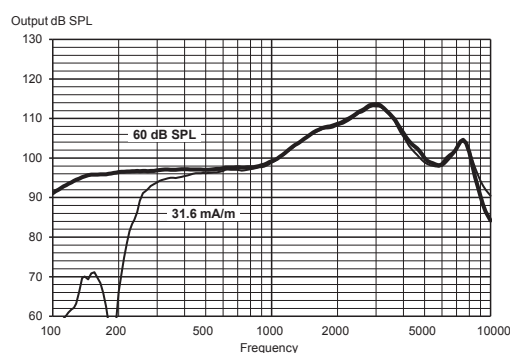

OUTPUT - 2CC COUPLER

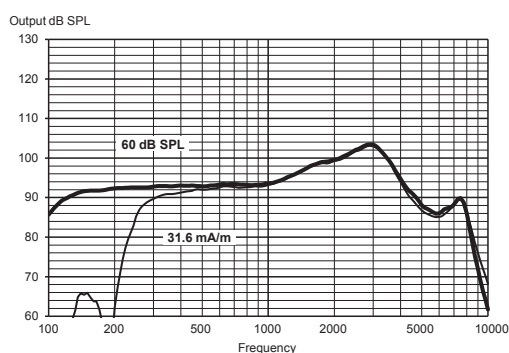

Technical data:

Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard, and with a 5x1.55mm tube. For further information, please contact Widex at global.widex.com.

		EAR SIMULATOR IEC 60118-0:1983 + A1:1994	2CC COUPLER IEC 60118-0:2015 , ANSI S3.22-2014
OSPL90	1600 Hz	121 dB SPL	112 dB SPL
	Peak	128 dB SPL	118 dB SPL
	Average	121 dB SPL	114 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz	107 dB SPL	98 dB SPL
	Peak	113 dB SPL	103 dB SPL
	Average	101 dB SPL	98 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz	66 dB	56 dB
	Peak	67 dB	59 dB
	Average	65 dB	56 dB
Telecoil output (Input 31.6 mA/m)	1600 Hz	107 dB SPL	98 dB SPL
	Peak	113 dB SPL	103 dB SPL
	Average	101 dB SPL	98 dB SPL
Acoustic frequency range		100 Hz - 9800 Hz	100 Hz - 8800 Hz
Harmonic distortion	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		23 dB SPL	22 dB SPL
Battery drain (standby)		1.05 mA	1.05 mA
Battery drain*		1.15 mA	1.27 mA
Battery life (Type 312 Zn-Air, 170 mAh)*		150 h	135 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -40/-31/-32 dB SPL	U-rating: M4/T4

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.

Do not modify this equipment without authorization of the manufacturer. Spare parts and instructions for correct repair can be acquired from Widex.