


ReSound Key™



Super Power BTE

Model	KE498-DW	KE398-DW	KE298-DW
Device Configurations			
Battery size	675 Zinc-Air		
IP Classification	IP 68		
Control option	Telecoil, DAI		
Audiological Features			
WARP compression (WDRC) - number of channels	12	8	6
Natural Directionality II	●		
Synchronised Soft Switching	●		
Soft Switching	●	●	●
Multiscope Adaptive Directionality	●	●	
Adaptive Directionality			●
Environmental Classifier	●	●	●
DFS Ultra II	●	●	●
Music Mode	●		
Noise Tracker II	●	●	●
Wind Guard	●	●	●
Impulse Noise Reduction	●		
Expansion	●	●	●
Synchronised Acceptance Manager	●	●	
Tinnitus Sound Generator	●	●	●
Functional Features			
Synchronised Push Button	●	●	
Synchronised Volume Control	●	●	
Smart Start	●	●	●
Phone Now	●	●	●
Comfort Phone	●	●	
Direct audio streaming (MFi, Android™*)	●	●	
ReSound TV Streamer 2, Remote Control, Remote 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●
ReSound Smart 3D™ app	●	●	●
ReSound Assist			
Remote Fine Tuning	●	●	●
ReSound Assist Live	●	●	●
Remote Firmware Updates	●	●	●
Fitting Features			
Fitting Software ReSound Smart Fit™ 1.10 or higher	●	●	●
Fully Flexible Programs	4	4	4
Auto DFS	●	●	●
Onboard Analyser II	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●

* Compatible with Android smartphones that support direct Android streaming to hearing aids

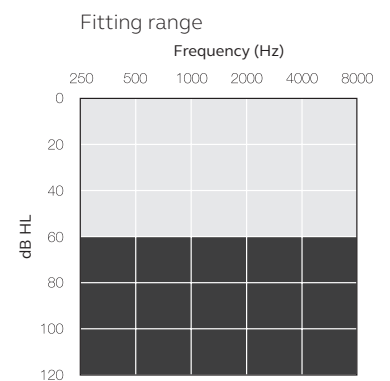

© 2020 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

Technical Specifications

KE98-DW

IEC 60118-0: 1983_AMD1:1994
IEC 60118-0:2015 (*)
IEC 711 Ear Simulator

ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler



Reference test gain (60 dB SPL input)	1600 Hz/HFA	62	53	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	86 74	83 67	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	144 136	141 130	dB SPL
Total harmonic distortion	500 Hz	4.7	4.2	%
	800 Hz	0.8	0.5	
	1600 Hz	0.8	0.7	
	3200 Hz	-	0.2	
Telecoil sensitivity (1 mA/m input)	Max.	117	113	dB SPL
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	123	113	
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	106	98	
Equivalent input noise, w/o Noise reduction		23	27	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	7	8	dB SPL
Frequency range IEC 60118-0: 2015		100-6120*	100-5200	Hz
Current Drain (Quiescent / Operating)		1.3/1.7	1.3/3.3	mA
Weight of hearing aid (without hook, tube and dome/ear mould)		4.50 / 0.16		gram/oz

* Measured according to IEC60118-0:2015, with 711-Ear simulator coupler.




IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

Patents pending

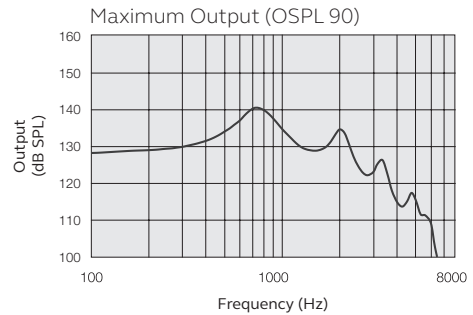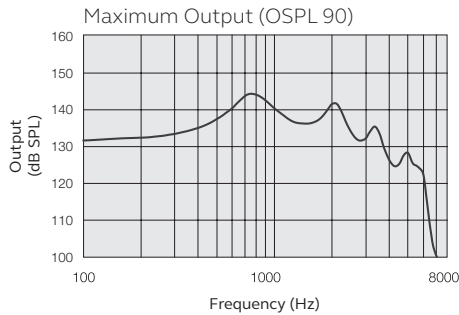

All specifications are subject to change without notice

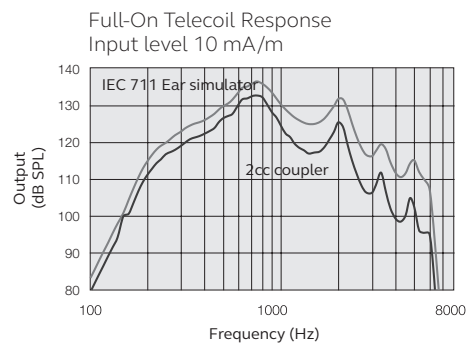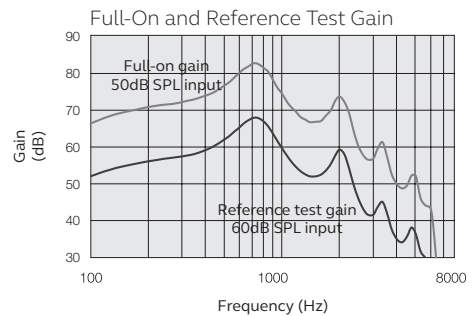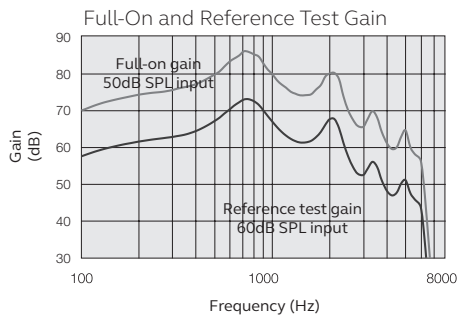

401422000GB-20.09-Rev.A

Worldwide Headquarters
GN ReSound A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com

United Kingdom
GN Hearing UK Ltd.
Kirtlington Business Centre
Portway, Kirtlington
Oxon OX5 3JA
Tel.: +44 1869 352 800
resound.com

Australia
GN Hearing Australia Pty Ltd
Gate C, 19-25 Khartoum Road
Macquarie Technology Park
Macquarie Park NSW 2113
Tel.: (free) 1800 658 955
resound.com

New Zealand
GN Hearing New Zealand Limited
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
resound.com

Singapore
GN Hearing Pte. Ltd.
456 Alexandra Road
#22-01
Singapore 119962
Tel.: +65 6320 9388
resound.com

CVR no. 55082715