


# Mojo RECHARGEABLE BTE R D

Minimal to severe-to-profound hearing losses  
M7/M6/M5/M4/M3



**Fitting range**

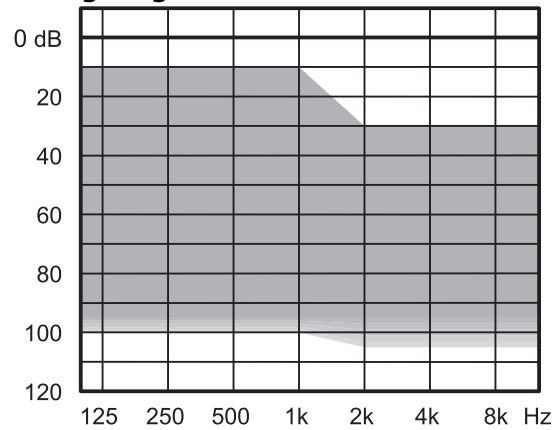

<b>Key Features</b>	<b>M7</b>	<b>M6</b>	<b>M5</b>	<b>M4</b>	<b>M3</b>
Processing and fine-tuning channels	15	12	10	6	6
In-Situ Sound Optimisation	•	•	•	•	•
Experience Level Manager	•	•	•	•	•
Programs	5	4	3	3	3
Automatic Adaptive Directionality channels	15	12	10	6	6
Volume Control II with LED	•	•	•	•	•
Programmable Push Button*	•	•	•	•	•
Ambient Noise Rejection II	•	•	•	•	•
Noise reduction	•	•	•	•	•
Preference Log	•	•	•	•	•
Linked ZEN	•	•	•	•	•
Linear Frequency Transposition	•	•	•	•	•
Acoustic Situation Technology	11 (Linked)	7 (Linked)	4	3	
Impulse Noise Rejection II	•	•	•		
Automatic Adaptive Directionality	•	•	•		
Speech Enhancer II	II/Linked	Linked			
Real Ear Effect	•	•			
Wind Noise Control II	•				
High-frequency boost	•				
<b>Connectivity</b>					
2.4 GHz control (Android and iOS)	•	•	•	•	•
2.4 GHz audio streaming (iOS)	•	•	•	•	•
Tcoil	•	•	•	•	•
DEX assistive listening device compatibility	•	•	•	•	•
<b>Accessories</b>					
Mojo App	•	•	•	•	•
Acoustic remote control App	•	•	•	•	•
COM-DEX App	•	•	•	•	•

\*Programmable: Volume control II, program shift or a combination of the two

**Colours**


114/Honey Blonde, 115/Chestnut Brown, 118/Tech Black, 119/Silver Grey, 120/Golden Brown, 121/Titanium Grey, 123/Autumn Beige

**TECHNICAL DATA**


		<b>EAR SIMULATOR</b> IEC 60118-0:1983, + A1:1994	<b>2CC COUPLER</b> IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	135 dB SPL 140 dB SPL 128 dB SPL	126 dB SPL 135 dB SPL 125 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	120 dB SPL 120 dB SPL 108 dB SPL	111 dB SPL 115 dB SPL 108 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz Peak Average	69 dB SPL 73 dB SPL 67 dB SPL	60 dB SPL 67 dB SPL 62 dB SPL
Telecoil	1600 Hz Peak Average	119 dB SPL 120 dB SPL 108 dB SPL	110 dB SPL 114 dB SPL 106 dB SPL
Acoustic Frequency range		100 Hz - 7900 Hz	100 Hz - 5750 Hz
Harmonic distortion (typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		15 dB SPL	20 dB SPL
Battery drain (standby)		1.25 mA	1.25 mA
Battery drain*		1.42 mA	1.3 mA
Battery life* (Rechargeable li-ion battery)		50 h	55 h
Mobile phone immunity (IEC 60118-13:2019 Ed. 5.0, ANSI C63.19:2019)		IEC: Bystander and User: In compliance	ANSI: In compliance

\*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


**MAXIMUM OUTPUT - EAR SIMULATOR**

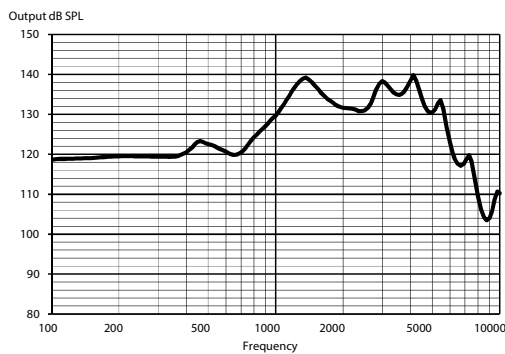

**MAXIMUM OUTPUT - 2CC COUPLER**

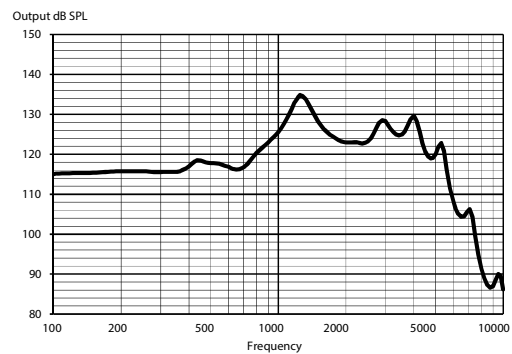

**OUTPUT - EAR SIMULATOR**

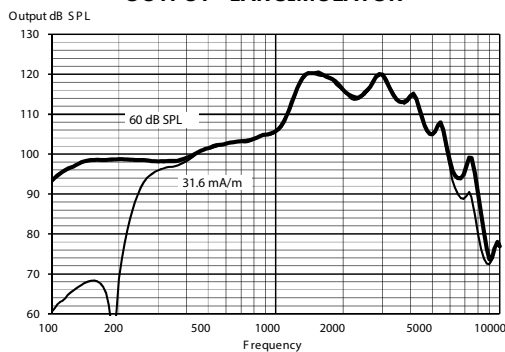

**OUTPUT - 2CC COUPLER**

