



RU60-DRWC

Model (MM Receiver)	RU960-DRWC	RU760-DRWC	RU560-DRWC	RU460-DRWC
Device Configurations				
Battery size 60-DRWC	Rechargeable Lithium-Ion			
Receiver Options	MM			
Control Options	Push button (PB)			
IP Classification	IP68			
Audiological Features				
Number of Channels	17	14	12	12
360 All-Around	●	-	-	-
All Access Directionality	-	●	-	-
Binaural Directionality III	-	-	●	-
Binaural Directionality	-	-	-	●
M&RIE	●	●	●	●
Front Focus	●	-	-	-
Ultra Focus	-	●	-	-
Synchronised Soft Switching	●	●	●	●
Environmental Optimiser II	●	-	-	-
Environmental Optimiser I	-	●	●	-
Noise Tracker II	5 settings	3 settings	2 settings	On/Off
Expansion	3 settings	2 settings	On/Off	On/Off
Impulse Noise Reduction	3 settings	3 settings	On/Off	On/Off
Wind Guard	3 settings	2 settings	On/Off	On/Off
DFS Ultra III (w/ Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
Functional Features				
Ear to Ear Communication	●	●	●	●
Direct audio streaming	●	●	●	●
ReSound TV Streamer 2, Remote Control, Remote Control 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●	●
ReSound Smart 3D™ app	●	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	-	-	-
Remote Fine Tuning and Updates				
ReSound Assist	●	●	●	●
ReSound Assist Live	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software Smart Fit™ 1.16 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Datalogging	●	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●	●
Automatic Receiver Detection	●	●	●	●



Standard charger




Premium charger



Desktop charger

Technical data	Premium charger	Standard charger	Desktop charger
Dimensions	99.4 x 35 x 67.5 mm / 3.9 x 1.4 x 2.7"	100.2 x 42 x 54.8 mm / 3.9 x 1.7 x 2.2"	82 x 36 x 46 mm / 3.2 x 1.4 x 1.8"
Weight	145 grams / 5.1 oz	95 grams / 3.3 oz	82 grams / 2.9 oz
Power Supply	USB power supply, 5 V	USB power supply, 5 V	USB power supply, 5 V
Charging form factor (CFF)	6	6	6
Internal Power Source	Rechargeable Lithium Ion battery, 3.6 V, 2600 mAh	N/A	N/A
Charging time for internal lithium ion battery in Charger	Max 3,5 hours, depending on initial state of the battery	N/A	N/A
Battery life (fully charged, not connected to mains power)	Min. 3 full charges of 2 hearing instruments, Without hearing instruments: 12 months	N/A	N/A
Charging time for Hearing Instrument	< 40 °C (104F): 3 hours, depending on initial state of the battery	< 40 °C (104F): 3 hours, depending on initial state of the battery	< 40 °C (104F): 3 hours, depending on initial state of the battery
Wireless frequency between Hearing Instrument and Charger	2.4 GHz and 333 kHz	2.4 GHz and 333 kHz	2.4 GHz and 333 kHz
ESD tolerance	According to IEC 61000-4-2 Electrostatic discharge immunity test standard	According to IEC 61000-4-2 Electrostatic discharge immunity test standard	According to IEC 61000-4-2 Electrostatic discharge immunity test standard
Operating & Charging temperature	+ 5 °C (41F) to + 40 °C (104F) at a relative humidity range of 15% to 90%, non-condensing	+ 5 °C (41F) to + 40 °C (104F) at a relative humidity range of 15% to 90%, non-condensing	+ 5 °C (41F) to + 40 °C (104F) at a relative humidity range of 15% to 90%, non-condensing
Storage temperature for charger and Hearing Instrument	-25 °C (-13F) to + 5 °C (41F), + 5 °C (41F) to + 35 °C (95F) at a relative humidity up to 90%, non-condensing, > 35 °C (95F) to 70 °C (158F) at a water vapour pressure up to 50 hPa	-25 °C (-13F) to + 5 °C (41F), + 5 °C (41F) to + 35 °C (95F) at a relative humidity up to 90%, non-condensing, > 35 °C (95F) to 70 °C (158F) at a water vapour pressure up to 50 hPa	-25 °C (-13F) to + 5 °C (41F), + 5 °C (41F) to + 35 °C (95F) at a relative humidity up to 90%, non-condensing, > 35 °C (95F) to 70 °C (158F) at a water vapour pressure up to 50 hPa



© 2022 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC.

Worldwide Headquarters
GN ReSound A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel: +45 4575 1111
resound.com

United Kingdom
GN Hearing UK Ltd.
Unit 13
Talisman Business Centre
Bicester
Oxon OX26 6HR
Tel: +44 1869 352800
resound.com

Australia
GN Hearing Australia Pty Ltd
Gate C, 19-25 Khartoum Road
Macquarie Technology Park
Macquarie Park NSW 2113
Tel: (free) 1800 658 955
resound.com

New Zealand
GN Hearing New Zealand Limited
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel: (free) 0800 900 126
resound.com

Singapore
GN Hearing Pte. Ltd.
456 Alexandra Road
#22-01
Singapore 119962
Tel: +65 6320 9388
resound.com

Technical Specifications


		MM		
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	41	33	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	63 53	53 47	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	124 117	115 110	dB SPL
Total harmonic distortion	500 Hz	0.3	0.1	%
	800 Hz	1.4	0.9	
	1600 Hz	0.8	0.4	
Equivalent input noise, w/o Noise reduction		22	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	7	7	dB SPL
Frequency range IEC60118-0:2015*		100-9550	100-9100	Hz
Battery Lifetime (Battery type Rechargeable)**		24	24	Hours

* Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.
 ** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.





Patents pending.

All specifications are subject to change without notice.

IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

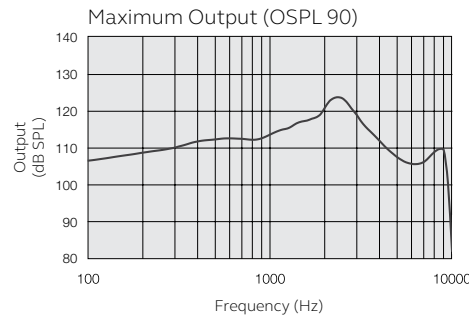

ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

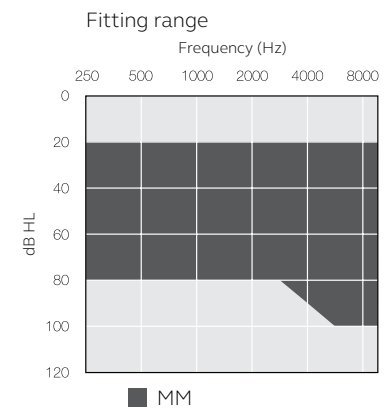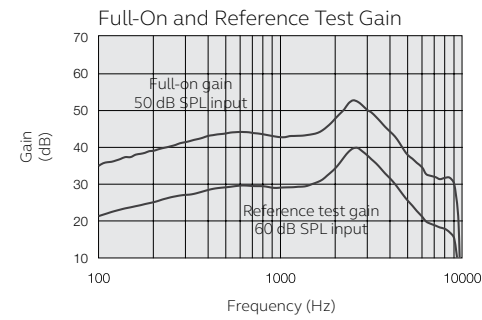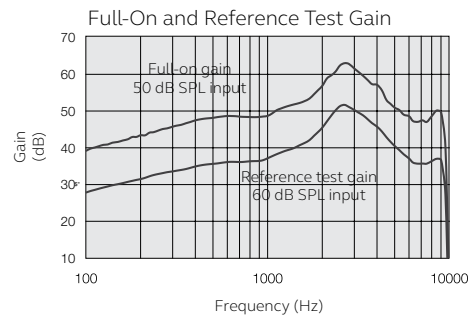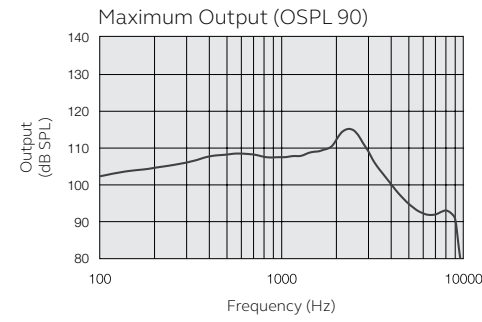

■ MM