

ReSound Enzo™ IA



EI98-DWHC  
Metal hook

EI98-DWHC  
Plastic hook

Model**	EI998-DWHC*	EI798-DWHC	EI598-DWHC	EI498-DWHC	EI398-DWHC
Device Configurations					
Battery size 98-DWHC	Rechargeable Lithium-Ion				
Control Options	TapControl Push button Multi-Function button Telecoil				
IP Classification	IP68				
Audiological Features					
Channels	17	14	12	12	12
360 All-Around	●	–	–	–	–
All Access Directionality	–	●	●	–	–
Binaural Directionality III	–	–	–	●	–
Clear Focus	●	–	–	–	–
Front Focus	–	●	–	–	–
Ultra Focus	–	–	●	–	–
Spatial Sense	●	●	●	●	–
Autoscope Adaptive Directionality (w/Adjustable Directional Mix)	●	●	●	●	●
Synchronised Soft Switching	●	●	●	●	●
Streaming Bass Boost	3 Settings	3 Settings	2 Settings	2 Settings	1 Setting
Fixed Directionality	●	●	●	●	●
Environmental Optimizer II	●	–	–	–	–
Environmental Optimizer I	–	●	●	●	–
Noise Tracker II	5 Settings	4 Settings	3 Settings	2 Settings	1 Setting
Wind Guard	3 Settings	3 Settings	2 Settings	2 Settings	1 Setting
Impulse Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings	1 Setting
Expansion	3 Settings	3 Settings	2 Settings	2 Settings	1 Setting
Sound Shaper	●	●	●	●	●
DFS Ultra III (w/Music Mode)	●	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●	●
Low frequency Boost	●	●	●	●	●
Amplification Strategy (WDRC/Semi-Linear/Linear)	●	●	●	●	●
Tinnitus Sound Generator	●	●	●	●	●
Functional Features					
Ear-to-Ear Communication	●	●	●	●	●
MultiConnect	●	●	●	●	●
Bluetooth® Auracast™	●	●	●	●	●
Direct audio streaming (compatible iOS*** and Android™ devices)	●	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●	●
ReSound Smart 3D™ app	●	●	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	–	–	–	–
Remote Fine Tuning and Updates					
ReSound Assist	●	●	●	●	●
ReSound Assist Live	●	●	●	●	●
Remote Firmware Updates	●	●	●	●	●
Fitting Features					
Fitting Software ReSound Smart Fit™ 2.2 or higher	●	●	●	●	●
Fully Flexible Programs	4	4	4	4	4
Datalogging	●	●	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●	●	●

\* EIX98-DWHC has the capability to change the feature set from the highest level to the other price points for demo purposes.  
\*\* Availability of models may vary by country.  
\*\*\* MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.



Desktop charger  
Charging form factor (CFF 90)



© 2025 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

Worldwide Headquarters  
GN Hearing A/S  
Lautrupbjerg 7  
DK-2750 Ballerup  
Denmark  
Tel: +45 4575 1111  
resound.com  
  
CVR no. 55082715

United Kingdom  
GN Hearing UK Ltd.  
Unit 13  
Talisman Business Centre  
Bicester  
Oxon OX26 6HR  
Tel: +44 1869 352800  
resound.com

Australia  
GN Hearing Australia Pty Ltd  
Suite 1001, Level 1  
1 Julius Avenue  
North Ryde, NSW 2113  
Australia  
Tel: (free) 1800 658 955  
resound.com

New Zealand  
GN Hearing New Zealand Limited  
Ground Floor, North Entrance  
4 Fred Thomas Drive  
Takapuna, Auckland, 0622  
Tel: (free) 0800 900 126  
resound.com

Technical Specifications

		EI98-DWHC - Metal hook	
		ANSI S3.22-2014 IEC 60118-0:2022 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	54	dB
Full-on gain (50 dB SPL input)	Max. HFA	84 69	dB
Maximum output (90 dB SPL input)	Max. HFA	140 131	dB SPL
Total harmonic distortion	500 Hz	6.8	%
	800 Hz	1.0	
	1600 Hz	0.4	
Full-on SPLIV @ 10mA/m	Max.	132	dB SPL
HFA-SPLIV @ 31.6 mA/m	HFA	114	
Full-on HFA-SPLIV @ 10mA/m	HFA	118	
Equivalent input noise, w/o Noise reduction		26	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	7	dB SPL
Frequency range		<200 - 5250	Hz
Battery Lifetime (Battery type Rechargeable)*		28 (max) 24 (typical)	Hours



\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment. Maximum number includes no streaming; typical number includes several hours of streaming.

Technical Specifications



		EI98-DWHC - Plastic hook**	
		ANSI S3.22-2014 IEC 60118-0:2022 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	54	dB
Full-on gain (50 dB SPL input)	Max. HFA	79 67	dB
Maximum output (90 dB SPL input)	Max. HFA	140 131	dB SPL
Total harmonic distortion	500 Hz	4.8	%
	800 Hz	0.7	
	1600 Hz	0.4	
Full-on SPLIV @ 10mA/m	Max.	127	dB SPL
HFA-SPLIV @ 31.6 mA/m	HFA	113	
Full-on HFA-SPLIV @ 10mA/m	HFA	116	
Equivalent input noise, w/o Noise reduction		24	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	7	dB SPL
Frequency range		<200 - 5330	Hz
Battery Lifetime (Battery type Rechargeable)*		28 (max) 24 (typical)	Hours

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment. Maximum number includes no streaming; typical number includes several hours of streaming.  
\*\* Optional: Plastic hook version of EI98-DWHC models are configured in fitting software with the plastic hook accessory.



Patents pending.

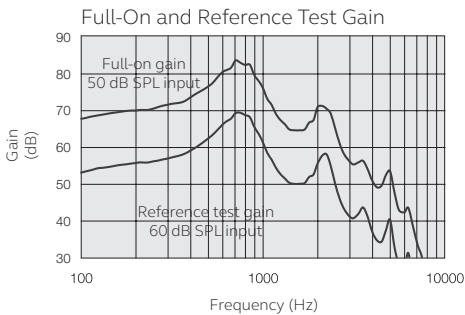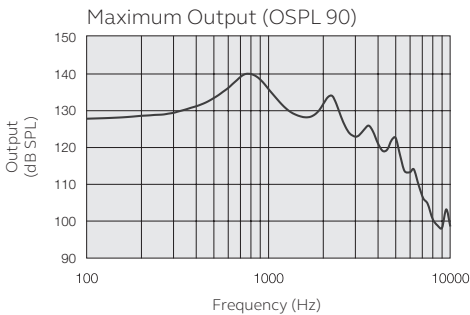

Patents pending.

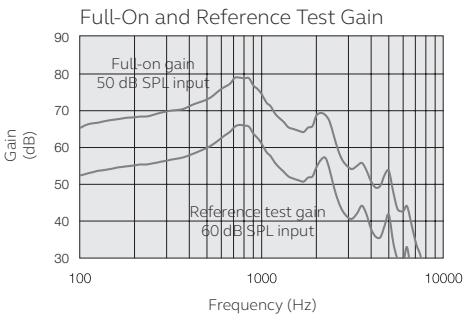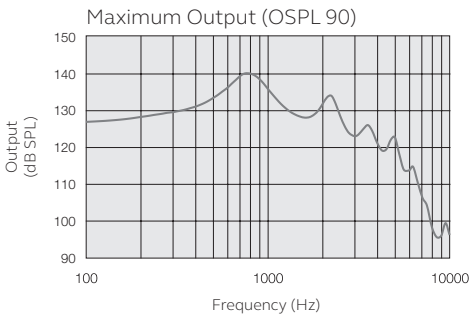

All specifications are subject to change without notice.

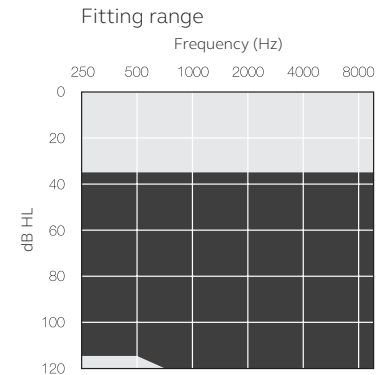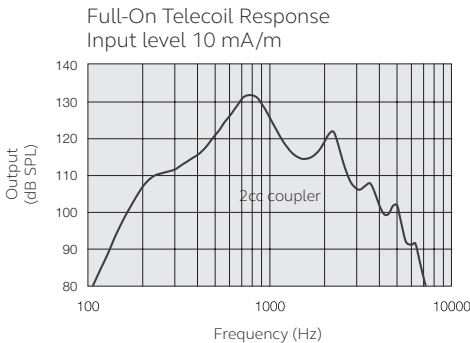

All specifications are subject to change without notice.

