



Model	NX971-DWC	NX771-DWC	NX571-DWC	NX471-DWC*
<b>Device Configurations</b>				
Battery size	Rechargeable Lithium-Ion			
Control Options	Push button			
IP Classification	IP68			
<b>Audiological Features</b>				
Number of Channels	17	14	12	12
360 All-Around	●	-	-	-
All Access Directionality	-	●	-	-
Binaural Directionality III	-	-	●	-
Binaural Directionality	-	-	-	●
Spatial Sense	●	●	●	-
Front Focus	●	-	-	-
Ultra Focus	-	●	-	-
Synchronised Soft Switching	●	●	●	●
Environmental Optimiser II	●	-	-	-
Environmental Optimiser I	-	●	●	-
Noise Tracker II	5 settings	3 settings	2 settings	On/Off
Expansion	3 settings	2 settings	On/Off	On/Off
Impulse Noise Reduction	3 settings	3 settings	On/Off	On/Off
Wind Guard	3 settings	2 settings	On/Off	On/Off
Sound Shaper	●	●	●	●
DFS Ultra III (w/ Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
<b>Functional Features</b>				
Ear-to-Ear Communication	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS** and Android™ devices)	●	●	●	●
Telecoil	●	●	●	●
TV-Streamer+	●	●	●	●
TV Streamer 2, Remote Control, Remote Control 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●	●
ReSound Smart 3D™ app	●	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	-	-	-
<b>Remote Fine Tuning and Updates</b>				
ReSound Assist	●	●	●	●
ReSound Assist Live	●	●	●	●
Remote Firmware Updates	●	●	●	●
<b>Fitting Features</b>				
Fitting Software ReSound Smart Fit™ 1.18 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Auto DFS	●	●	●	●
Datalogging	●	●	●	●
Wireless Fitting with Noalink Wireless	●	●	●	●

\* Availability of models may vary by country.  
 \*\* MFI supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation), iPad (10th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.



Technical data	Desktop Charger
Dimensions	82,0 mm x 36,0 mm x 45,3 mm / 3.2" x 1.4" x 1.8"
Weight	82 grams / 2.9 oz
Power Supply	USB power supply, 5 V
Charging form factor (CFF)	70
Charging time for Hearing Instrument	< 35 °C (95F): 3 hours, depending on initial state of the battery
Wireless frequency between Hearing Instrument and Charger	2.4 GHz and 333 kHz
ESD tolerance	According to IEC 61000-4-2 Electrostatic discharge immunity test standard
Operating & Charging temperature	+ 5 °C (41F) to + 35 °C (95F) at a relative humidity range of 15% to 90%, non-condensing
Storage temperature for charger and Hearing Instrument	- 25 °C (-13F) to + 5 °C (41F), + 5 °C (41F) to + 35 °C (95F) at a relative humidity up to 90%, non-condensing, > 35 °C (95F) to 60 °C (140F) at a water vapour pressure up to 50 hPa



# Technical Specifications

## NX71-DWC (Closed)

		IEC 60118-0: 1983_ AMD1:1994 IEC 60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	44	42	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	65 54	58 51	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	132 123	125 118	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.4 1.0 0.8	0.3 0.7 0.4	%
Telecoil sensitivity (1 mA/m input)	Max.	97	89	dB SPL
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	107	102	
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	85	81	
Equivalent input noise, w/o Noise reduction		25	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	10	10	dB SPL
Frequency range		<200 - >8000	<200 - 6380	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.

# Technical Specifications

## NX71-DWC (Open)

		IEC 60118-0: 1983_ AMD1:1994 IEC 60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	39	35	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	58 50	51 44	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	125 117	122 111	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.2 0.1 0.8	0.2 0.1 0.4	%
Telecoil sensitivity (1 mA/m input)	Max.	90	82	dB SPL
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	102	96	
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	80	76	
Equivalent input noise, w/o Noise reduction		24	22	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	9	9	dB SPL
Frequency range		<200 - >8000	<200 - 6980	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


Patents pending.

All specifications are subject to change without notice.


Patents pending.

All specifications are subject to change without notice.


IEC 60118-0: 1983\_ AMD1:1994  
IEC 711 Ear Simulator

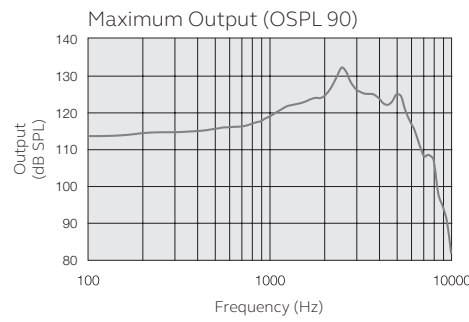

ANSI S3.22-2014  
IEC 60118-0:2015  
JIS C 5512: 2015  
2cc coupler

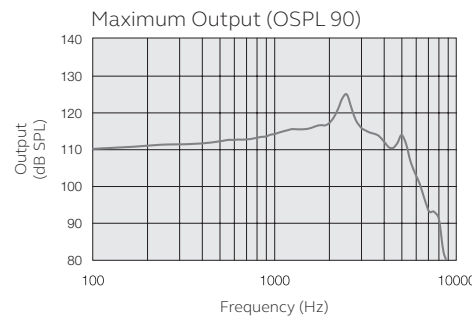

IEC 60118-0: 1983\_ AMD1:1994  
IEC 711 Ear Simulator

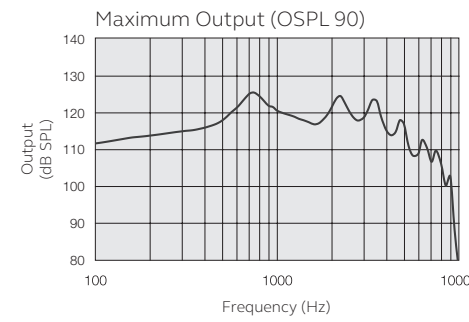

ANSI S3.22-2014  
IEC 60118-0:2015  
JIS C 5512: 2015  
2cc coupler

